

STABLE & EASY-TO-USE

Large-area mapping with centimeter-level precision and optional PPK for survey-grade results



1.7
cm GSD at 122m
(400ft) altitude

3G/4G
Connectivity








1
GNSS accuracy
down to 1 cm

59
Minutes
Endurance

UX11

PROFESSIONAL SMALL UAV,
SURVEY AND MAP WITH EASE

INDUSTRIES

 Surveying & Mapping	 Mines & Quarries	 Power & Utilities	 Security & Defense
 Construction	 Oil & Gas	 Transportation	 Agriculture & forestry

KEY APPLICATIONS

- Mapping & GIS
- Surveying
- Construction
- Environmental and Conservation
- Surface Mining
- Aggregates
- Public Land Management
- Landfill Management

KEY DIFFERENTIATORS

Map large areas faster - One pilot can map 9,6 km² (3,7mi²) in an 8-hour day with 1,7 cm GSD at 122 m flight height. Industrial camera with optional PPK activation for survey-grade results. No need to sacrifice resolution for productivity when you can have both.

BVLOS-ready communications - Dual-communication systems including WiFi radio link and mobile connectivity via 3G network (4G-ready) for unlimited range.

Precise "birdlike" takeoff and landing (BTOL) - high-angle (30 degrees) takeoffs and deep stall landings for use in confined areas, low-speed landing using distance-measurement technology.

Delair Flight Deck - easy-to-use Android™ mission planning and monitoring app - pre-flight checklist, no-fly zones, modern user interface, in-flight data review.

UAV SPECIFICATIONS

Endurance ^{1,2}	Up to 59 minutes
Weight (payload included)	1.5 kg (3.3 lbs)
Wingspan	1.1 m (43 in)
Deployment time ¹	5 min
Cruise speed ^{1,2}	54 km/h (34 mph)
Take-off / Landing	Hand-launched (angle: 30 degrees) / Belly landing (angle: 30 degrees)
Flying range ¹	53 km (33 mi)
Surface area covered ¹	
Nominal (60% side overlap): 1.2 km ² (300 ac) with 1,7 cm GSD at 122 m (400 ft) AGL	
Maximum (60% side overlap): 6,5 km ² (1600 ac) with 13,9 cm GSD at 1,000 m (3,280 ft) AGL	

Communication range

3G/4G	Unlimited (within network coverage)
Delair Link (2.4 GHz radio) ^{1,3}	5 km in FCC configuration (and up to 10 km), 3 km in CE configuration (and up to 5 km).

Operating conditions

Weather	45 km/h (28 mph) wind resistance, moderate rain
Maximum altitude (MSL) ¹	Takeoff at 5,000 m (16,400 ft) Flight at 6,000 m (19,700 ft)
Landing accuracy ¹	5 m (16 ft)
Temperature ¹	-20 to 45 C (-4 to 110 F)

GNSS..... PPK optional (software activated), L1/L2, GPS+GLONASS

SENSOR

Industrial-grade RGB camera sensor built-in

Sensor type	Global shutter, distortion free
Image resolution	21.4 Mpix
Dynamic range	70 dB
HFOV / VFOV	38° / 32°
In-flight sensor configuration	Auto or manual (brightness)
In-flight picture transmission	Real-time histogram plot and photo review with quality indicators
High quality raw output	

TRANSPORT CASE


Lightweight rugged backpack, airplane checkable

14kg with all accessories, 79x43x35 cm (31x17x14 in)

ПП "НАВГЕОТЕХ"

79029, м. Львів, вул. Героїв УПА, 73 корпус 5а
тел.: +380676751217, +380505986745
e-mail: naveotech@gmail.com
www.naveotech.com

DELAIR AUTHORIZED DISTRIBUTION PARTNER

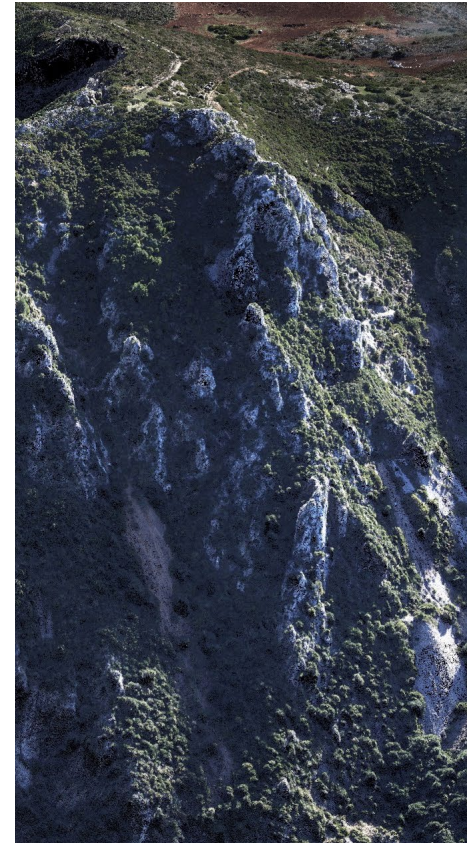

DELIVERABLES

Use Delair After Flight software (included) for PPK processing and to prepare Raw data for any photogrammetry software.

DELAIR AERIAL INTELLIGENCE PLATFORM

The cloud-based platform helps you manage, process, view, analyze and collaborate around aerial data.

Get business insights from aerial data in a simple, secure and scalable way.

Analytics available: ortho image & DSM (Digital Surface Model), Contour lines, Cross sections, Elevation profiles, Stockpile Volume Calculation, Vegetation Encroachment, Cut and Fill, and many more.

- 1 Actual results may vary depending on UAV configuration, battery age and condition, and operational, environmental and climate conditions.
- 2 Varies depending on altitude.
- 3 In good line of sight conditions with no signal interference.

Specifications subject to change without notice to improve reliability, function or design or otherwise.
© 2018, Delair-Tech SAS. All rights reserved. Delair is a trademark of Delair-Tech SAS, registered in France. All other trademarks are the property of their respective owners.



www.delair.aero

FRANCE: Toulouse - Headquarters | USA: Los Angeles | BELGIUM: Gent | ASIA PACIFIC: Singapore